
To: relevant departments of CCS Headquarters, CCS surveyors, product manufacturers

Technical notice on implementation of IACS UR E10-Rev. 7-Test Specification for Type Approval

Background

- 1 The International Association of Classification Societies (IACS) approved the Revision 7 (Rev. 7) of the Uniform Requirements (UR) E10 - Test Specification for Type Approval in October 2018.
- 2 Rev.7 of this UR is to be uniformly implemented by CCS for equipment for which the date of application for type approval certification is dated on or after 1 January 2020. Equipment intended to be installed on ships contracted for construction on or after 1 January 2022 is to comply with Rev.7 of this UR.
- 3 According to Rev.7 of this UR, Guidelines for Type Approval Test of Electric and Electronic Products (2015) issued by CCS will be revised accordingly.
- 4 The above-mentioned “date of application for type approval” is the date of documents accepted by the CCS as request for type approval certification of a new equipment type or of an equipment type that has undergone substantive modifications in respect of the one previously type approved, or for renewal of an expired type approval certificate.
- 5 The above-mentioned “contracted for construction” date means the date on which the contract to build the vessel is signed between the prospective owner and the shipbuilder. For further details regarding the date of “contract for construction”, refer to IACS Procedural Requirement (PR) No. 29.

Main contents

- 6 Guidelines for Type Approval Test of Electric and Electronic Products (2015) issued by CCS are revised as follows:

- .1 In 2.8.2, standard applied for heat-dissipating equipment is IEC Publication 60068-2-2, Test Be.
- .2 In 2.8.3 (2), dry heat at 70°C is to be carried out to automation, control and

instrumentation equipment subject to high degree of heat, for example mounted in consoles, housings, etc. together with other heat dissipating power equipment.

.3 At the end of the sentence in 3.3.2, "and IEC 60945 for 156-165 MHz" is supplemented.

.4 In 3.3.3 (2), "2 GHz" is revised to "6 GHz".

.5 In 3.3.4 (1), "2 GHz" is revised to "6 GHz".

.6 In 3.3.5, "the frequency range 150 kHz~2 GHz" is revised to "the frequency range 150 kHz~6 GHz". Meanwhile, Table 3.3.5 is replaced by the following:

Limits for radiated emissions from enclosure port (Limits below 1000 MHz)

Table 3.3.5a)

Site	Frequency range	Quasi peak limits:
Bridge and deck zone	150 kHz ~ 300 kHz	80 dB μ V/m ~ 52 dB μ V/m
	300 kHz ~ 30 MHz	52 dB μ V/m ~ 34 dB μ V/m
	30 MHz ~ 1 GHz Except for: 156 MHz~165 MHz	54 dB μ V/m 24 dB μ V/m ^①
General power distribution zone	150 kHz ~ 30 MHz	80 dB μ V/m ~ 50 dB μ V/m
	30 MHz ~ 100 MHz	60 dB μ V/m ~ 54 dB μ V/m
	100 MHz ~ 1 GHz Except for: 156 MHz ~ 165 MHz	54 dB μ V/m 24 dB μ V/m ^①
① Alternatively the radiation limit at a distance of 3 m from the enclosure port over the frequency 156 MHz to 165 MHz shall be 30 dB micro-V/m Peak (as per IEC 60945).		

Limits for radiated emissions from enclosure port (Limits above 1000 MHz)

Table 3.3.5b)

Frequency range	Average limit
1000 - 6000 MHz	54 dB μ V/m
NOTE: Equipment intended to transmit radio signals for the purpose of radio communication (e.g. wifi router, remote radio controller) may be exempted from limit, within its communication frequency range, subject to the provisions in UR E22.5.2.	

.7 In 3.5.3 (2), "2 GHz" is revised to "6 GHz".

.8 At the end of the sentence in 3.5.5, the sentence is added that "But if an equipment is intended to receive radio signals for the purpose of radio communication (e.g. wifi router, remote radio controller), then the immunity limits at its communication frequency do not apply, subject to the provisions in UR E22.5.2".

This technical information is made public on CCS website (www.ccs.org.cn), and is to be distributed to relevant marine products manufacturer by CCS branches within their responsible areas. Please contact Technology & Information Department of CCS (ti@ccs.org.cn) for any inquiry in the implementation.

Annex:

Rev.7 of the Uniform Requirements (UR) E10 - Test Specification for Type Approval

E10 Test Specification for Type Approval

(1991)
(Rev.1
1993)
(Rev.2
1997)
(Rev. 2.1
July 1999)
(Rev.3
May 2001)
(Corr.1
July 2003)
(Rev.4
May 2004)
(Rev.5
Dec 2006)
(Rev.6
Oct 2014)
(Rev.7
Oct 2018)

E10.1 General

This Test Specification is applicable, but not confined, to electrical, electronic and programmable equipment intended for control, monitoring, alarm and protection systems for use in ships.

E10.2 Testing

These tests are to demonstrate the ability of the equipment to function as intended under the specified testing conditions.

The extent of the testing (i.e. the selection and sequence of carrying out tests and number of pieces to be tested) is to be determined upon examination and evaluation of the equipment or component subject to testing giving due regard to its intended usage.

Equipment is to be tested in its normal position if otherwise not specified in the test specification.

Note:

1. Rev.5 of this UR is to be uniformly implemented by IACS Societies from 1 January 2008.
2. Rev.6 of this UR is to be uniformly implemented by IACS Societies from 1 January 2016.
3. Rev.7 of this UR is to be uniformly implemented by IACS Societies for equipment for which the date of application for type approval certification is dated on or after 1 January 2020.
4. Equipment intended to be installed on ships contracted for construction on or after 1 January 2022 is to comply with Rev.7 of this UR.
5. The “contracted for construction” date means the date on which the contract to build the vessel is signed between the prospective owner and the shipbuilder. For further details regarding the date of “contract for construction”, refer to IACS Procedural Requirement (PR) No. 29.
6. The “date of application for type approval” is the date of documents accepted by the Classification Society as request for type approval certification of a new equipment type or of an equipment type that has undergone substantive modifications in respect of the one previously type approved, or for renewal of an expired type approval certificate.

E10

(cont)

Relevant tests are as listed in the Table.

Note:

- a) * These test requirements are harmonised with IEC 60092-504 “Electrical Installations in Ships - Part 504: Special features - Control and Instrumentation” and IEC 60533 “Electrical and electronic installations in ships – electromagnetic compatibility”. Electrical and electronic equipment on board ships, required neither by classification rules nor by International Conventions, liable to cause electromagnetic disturbance shall be of type which fulfil the test requirements of test specification items 19 and 20.
- b) As used in this document, and in contrast to a complete performance test, a functional test is a simplified test sufficient to verify that the equipment under test (EUT) has not suffered any deterioration caused by the individual environmental tests.

Type testing condition for equipment covered by E10.1

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION
* indicates the testing procedure which is normally to be applied. However, equivalent testing procedure may be accepted by the individual Society provided that the Unified Requirements stated in the other columns are fulfilled. The latest edition of the normative reference applies.				
1.	Visual inspection	-	-	- conformance to drawings, design data
2.	Performance test	Manufacturer performance test programme based upon specification and relevant Rule requirements. When the EUT is required to comply with an international performance standard, e.g. protection relays, verification of requirements in the standard are to be part of the performance testing required in this initial test and subsequent performance tests after environmental testing where required in the UR.	<ul style="list-style-type: none"> - standard atmosphere conditions - temperature: $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ - relative humidity: $60\% \pm 30\%$ - air pressure: $96 \text{ KPa} \pm 10 \text{ KPa}$ 	<ul style="list-style-type: none"> - confirmation that operation is in accordance with the requirements specified for particular system or equipment; - checking of self-monitoring features; - checking of specified protection against an access to the memory; - checking against effect of unerroneous use of control elements in the case of computer systems.

IACS Reg. 1991/Rev.7 2018

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION
5.	Dry heat (see note 1)	IEC 60068-2-2 <u>Test Bb for non-heat dissipating equipment</u>	Temperature: $55^{\circ} \pm 2^{\circ}\text{C}$ Duration: 16 hours or Temperature: $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Duration: 16 hours (see note 1)	- equipment operating during conditioning and testing; - functional test (b) during the last hour at the test temperature. - for equipment specified for increased temperature the dry heat test is to be conducted at the agreed test temperature and duration.
		IEC 60068-2-2 <u>Test Be for heat dissipating equipment</u>	Temperature: $55^{\circ} \pm 2^{\circ}\text{C}$ Duration: 16 hours or Temperature: $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Duration: 16 hours	- equipment operating during conditioning and testing with cooling system on if provided; - functional test (b) during the last hour at the test temperature. - for equipment specified for increased temperature the dry heat test is to be conducted at the agreed test temperature and duration.
6.	Damp heat	IEC 60068-2-30 test Db	Temperature: 55°C Humidity: 95% Duration: 2 cycles 2 x (12 +12 hours)	- measurement of insulation resistance before test; - the test shall start with $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and at least 95% humidity; - equipment operating during the complete first cycle and switched off during second cycle except for functional test; - functional test during the first 2 hours of the first cycle at the test temperature and during the last 2 hours of the second cycle at the test temperature; Duration of the second cycle can be extended due to more convenient handling of the functional test. - recovery at standard atmosphere conditions; - insulation resistance measurements and performance test.
7.	Vibration	IEC 60068-2-6 Test Fc	2^{+3}_{-0} Hz to 13.2 Hz – amplitude $\pm 1\text{mm}$ 13.2 Hz to 100 Hz – acceleration $\pm 0.7\text{ g}$. For severe vibration conditions such as, e.g. on diesel engines, air compressors, etc.: 2.0 Hz to 25 Hz – amplitude $\pm 1.6\text{ mm}$ 25.0 Hz to 100 Hz – acceleration $\pm 4.0\text{ g}$.	- duration in case of no resonance condition 90 minutes at 30 Hz; - duration at each resonance frequency at which $Q \geq 2$ is recorded - 90 minutes; - during the vibration test, functional tests are to be carried out; - tests to be carried out in three mutually perpendicular planes; - it is recommended as guidance that Q does not exceed 5.

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION
			<p>Note: More severe conditions may exist for example on exhaust manifolds or fuel oil injection systems of diesel engines. For equipment specified for increased vibration levels the vibration test is to be conducted at the agreed vibration level, frequency range and duration. Values may be required to be in these cases 40 Hz to 2000 Hz - acceleration $\pm 10.0g$ at 600°C, duration 90 min.*</p>	<p>- where sweep test is to be carried out instead of the discrete frequency test and a number of resonant frequencies is detected close to each other, duration of the test is to be 120 min. Sweep over a restricted frequency range between 0.8 and 1.2 times the critical frequencies can be used where appropriate. Note: Critical frequency is a frequency at which the equipment being tested may exhibit:</p> <ul style="list-style-type: none"> - malfunction and/or performance deterioration - mechanical resonances and/or other response effects occur, e.g. chatter
8.	Inclination	IEC 60092-504	<p>Static 22.5°</p> <p>Dynamic 22.5°</p>	<p>a) inclined to the vertical at an angle of at least 22.5° b) inclined to at least 22.5° on the other side of the vertical and in the same plane as in (a), c) inclined to the vertical at an angle of at least 22.5° in plane at right angles to that used in (a), d) inclined to at least 22.5° on the other side of the vertical and in the same plane as in (c). Note: The period of testing in each position should be sufficient to fully evaluate the behaviour of the equipment.</p> <p>Using the directions defined in a) to d) above, the equipment is to be rolled to an angle of 22.5° each side of the vertical with a period of 10 seconds. The test in each direction is to be carried out for not less than 15 minutes. On ships for the carriage of liquified gases and chemicals, the emergency power supply is to remain operational with the ship flooded up to a maximum final athwart ship inclination of 30°.</p> <p>Note: These inclination tests are normally not required for equipment with no moving parts.</p>

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION															
9.	Insulation resistance	<table><tr><th>Rated supply voltage Un (V)</th><th>Test voltage (D.C. voltage) (V)</th><th colspan="2">Min. insulation resistance</th></tr><tr><th></th><th></th><th>before test M ohms</th><th>after test M ohms</th></tr><tr><td>Un ≤ 65</td><td>2 x Un min. 24V</td><td>10</td><td>1,0</td></tr><tr><td>Un > 65</td><td>500</td><td>100</td><td>10</td></tr></table>	Rated supply voltage Un (V)	Test voltage (D.C. voltage) (V)	Min. insulation resistance				before test M ohms	after test M ohms	Un ≤ 65	2 x Un min. 24V	10	1,0	Un > 65	500	100	10	<ul style="list-style-type: none">- For high voltage equipment, reference is made to UR E11.- insulation resistance test is to be carried out before and after: damp heat test, cold test, salt mist test and high voltage test;- between all phases and earth; and where appropriate, between the phases. <p>Note: Certain components e.g. for EMC protection may be required to be disconnected for this test.</p>
Rated supply voltage Un (V)	Test voltage (D.C. voltage) (V)	Min. insulation resistance																	
		before test M ohms	after test M ohms																
Un ≤ 65	2 x Un min. 24V	10	1,0																
Un > 65	500	100	10																
10.	High voltage	<table><tr><th>Rated voltage Un (V)</th><th>Test voltage (A.C. voltage 50 or 60Hz) (V)</th></tr><tr><td>Up to 65</td><td>2 x Un + 500</td></tr><tr><td>66 to 250</td><td>1500</td></tr><tr><td>251 to 500</td><td>2000</td></tr><tr><td>501 to 690</td><td>2500</td></tr></table>	Rated voltage Un (V)	Test voltage (A.C. voltage 50 or 60Hz) (V)	Up to 65	2 x Un + 500	66 to 250	1500	251 to 500	2000	501 to 690	2500	<ul style="list-style-type: none">- For high voltage equipment, reference is made to UR E11.- separate circuits are to be tested against each other and all circuits connected with each other tested against earth;- printed circuits with electronic components may be removed during the test;- period of application of the test voltage: 1 minute						
Rated voltage Un (V)	Test voltage (A.C. voltage 50 or 60Hz) (V)																		
Up to 65	2 x Un + 500																		
66 to 250	1500																		
251 to 500	2000																		
501 to 690	2500																		
11.	Cold	IEC 60068-2-1	Temperature: +5°C ± 3°C Duration: 2 hours or Temperature: -25°C ± 3°C Duration: 2 hours (see note 2)	<ul style="list-style-type: none">- initial measurement of insulation resistance;- equipment not operating during conditioning and testing except for functional test;- functional test during the last hour at the test temperature;- insulation resistance measurement and the functional test after recovery															
12.	Salt mist	IEC 60068-2-52 Test Kb	Four spraying periods with a storage of 7 days after each.	<ul style="list-style-type: none">- initial measurement of insulation resistance and initial functional test;- equipment not operating during conditioning;- functional test on the 7th day of each storage period;- insulation resistance measurement and performance test 4 to 6h after recovery. (see Note 3)- on completion of exposure, the equipment shall be examined to verify that deterioration or corrosion (if any) is superficial in nature.															

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION
13.	Electrostatic discharge	IEC 61000-4-2	Contact discharge: 6kV Air discharge: 2kV, 4kV, 8kV Interval between single discharges: 1 sec. No. of pulses: 10 per polarity According to test level 3.	<ul style="list-style-type: none"> - to simulate electrostatic discharge as may occur when persons touch the appliance; - the test is to be confined to the points and surfaces that can normally be reached by the operator; - Performance Criterion B (See Note 4).
14.	Electromagnetic field	IEC 61000-4-3	Frequency range: 80 MHz to ≥ 6 GHz Modulation**: 80% AM at 1000Hz Field strength: 10V/m Frequency sweep rate: $\leq 1.5 \times 10^{-3}$ decades/s (or 1%/3 sec) According to test level 3.	<ul style="list-style-type: none"> - to simulate electromagnetic fields radiated by different transmitters; - the test is to be confined to the appliances exposed to direct radiation by transmitters at their place of installation. - Performance criterion A (See Note 5) **If for tests of equipment an input signal with a modulation frequency of 1000 Hz is necessary a modulation frequency of 400 Hz may be chosen. - <u>If an equipment is intended to receive radio signals for the purpose of radio communication (e.g. wifi router, remote radio controller), then the immunity limits at its communication frequency do not apply, subject to the provisions in UR E22.5.2.</u>
15.	Conducted low Frequency		<p>AC:</p> <p>Frequency range: rated frequency to 200th harmonic;</p> <p>Test voltage (rms): 10% of supply to 15th harmonic reducing to 1% at 100th harmonic and maintain this level to the 200th harmonic, min 3 V r.m.s, max 2 W.</p> <p>DC:</p> <p>Frequency range: 50 Hz - 10 kHz;</p> <p>Test voltage (rms): 10% of supply max. 2 W</p>	<ul style="list-style-type: none"> - to stimulate distortions in the power supply system generated for instance, by electronic consumers and coupled in as harmonics; - performance criterion A (see Note 5). - See figure - "Test set-up" - for keeping max. 2W, the voltage of the test signal may be lower.

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION
16.	Conducted Radio Frequency	IEC 61000-4-6	AC, DC, I/O ports and signal/control lines: Frequency range: 150 kHz - 80 MHz Amplitude: 3 V rms (See Note 6) Modulation ***: 80% AM at 1000 Hz Frequency sweep range: $\leq 1.5 \times 10^{-3}$ decades/s (or 1%/3sec.) According to test level 2.	- Equipment design and the choice of materials is to stimulate electromagnetic fields coupled as high frequency into the test specimen via the connecting lines. - performance criterion A (see Note 5). *** If for tests of equipment an input signal with a modulation frequency of 1000 Hz is necessary a modulation frequency of 400 Hz may be chosen.
17.	Electrical Fast Transients / Burst	IEC 61000-4-4	Single pulse rise time: 5 ns (between 10% and 90% value) Single pulse width: 50 ns (50% value) Amplitude (peak): 2kV line on power supply port/earth; 1kV on I/O data control and communication ports (coupling clamp) Pulse period: 300 ms; Burst duration: 15 ms; Duration/polarity: 5 min According to test level 3.	- arcs generated when actuating electrical contacts; - interface effect occurring on the power supply, as well as at the external wiring of the test specimen; - performance criterion B (see Note 4).
18.	Surge	IEC 61000-4-5	Test applicable to AC and DC power ports Open-circuit voltage: Pulse rise time: 1.2 μ s (front time) Pulse width: 50 μ s (time to half value) Amplitude (peak): 1kV line/earth; 0.5kV line/line Short-circuit current: Pulse rise time: 8 μ s (front time) Pulse width: 20 μ s (time to half value) Repetition rate: ≥ 1 pulse/min No of pulses: 5 per polarity Application: continuous According to test level 2.	- interference generated for instance, by switching "ON" or "OFF" high power inductive consumers; - test procedure in accordance with figure 10 of the standard for equipment where power and signal lines are identical; - performance criterion B (see Note 4).

E10

(cont)

NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION																												
19.	Radiated Emission	CISPR 16-2-3 <u>IEC 60945 for 156-165 MHz</u>	<p><u>Limits below 1000 MHz</u></p> <p>For equipment installed in the bridge and deck zone.</p> <table><tr><td>Frequency range:</td><td>Quasi peak limits:</td></tr><tr><td>0.15 - 0.3 MHz</td><td>80 - 52 dBμV/m</td></tr><tr><td>0.3 - 30 MHz</td><td>52 - 34 dBμV/m</td></tr><tr><td>30 - 2000 <u>1000</u> MHz</td><td>54 dBμV/m</td></tr><tr><td>except for:</td><td></td></tr><tr><td>156 -165 MHz</td><td>24 dBμV/m</td></tr></table> <p>For equipment installed in the general power distribution zone.</p> <table><tr><td>Frequency range:</td><td>Quasi peak limits:</td></tr><tr><td>0.15 - 30 MHz</td><td>80 - 50 dBμV/m</td></tr><tr><td>30 - 100 MHz</td><td>60 - 54 dBμV/m</td></tr><tr><td>100 - 2000 <u>1000</u> MHz</td><td>54 dBμV/m</td></tr><tr><td>except for:</td><td></td></tr><tr><td>156 -165 MHz</td><td>24 dBμV/m</td></tr></table> <p><u>Limits above 1000 MHz</u></p> <table><tr><td>Frequency range:</td><td>Average limit:</td></tr><tr><td><u>1000 - 6000 MHz</u></td><td>54 dBμV/m</td></tr></table>	Frequency range:	Quasi peak limits:	0.15 - 0.3 MHz	80 - 52 dBμV/m	0.3 - 30 MHz	52 - 34 dBμV/m	30 - 2000 <u>1000</u> MHz	54 dBμV/m	except for:		156 -165 MHz	24 dBμV/m	Frequency range:	Quasi peak limits:	0.15 - 30 MHz	80 - 50 dBμV/m	30 - 100 MHz	60 - 54 dBμV/m	100 - 2000 <u>1000</u> MHz	54 dBμV/m	except for:		156 -165 MHz	24 dBμV/m	Frequency range:	Average limit:	<u>1000 - 6000 MHz</u>	54 dBμV/m	<p>- procedure in accordance with the standard but distance 3 m between equipment and antenna</p> <p>- <u>for the frequency band 156 MHz to 165 MHz the measurement shall be repeated with a receiver bandwidth of 9 kHz (as per IEC 60945).</u></p> <p>- alternatively the radiation limit at a distance of 3 m from the enclosure port over the frequency 156 MHz to 165 MHz shall be 30 dB micro-V/m Peak <u>(as per IEC 60945).</u></p> <p>- procedure in accordance with the standard <u>(distance 3 m between equipment and antenna)</u></p> <p>-<u>Equipment intended to transmit radio signals for the purpose of radio communication (e.g. wifi router, remote radio controller) may be exempted from limit, within its communication frequency range, subject to the provisions in UR E22.5.2.</u></p>
Frequency range:	Quasi peak limits:																															
0.15 - 0.3 MHz	80 - 52 dBμV/m																															
0.3 - 30 MHz	52 - 34 dBμV/m																															
30 - 2000 <u>1000</u> MHz	54 dBμV/m																															
except for:																																
156 -165 MHz	24 dBμV/m																															
Frequency range:	Quasi peak limits:																															
0.15 - 30 MHz	80 - 50 dBμV/m																															
30 - 100 MHz	60 - 54 dBμV/m																															
100 - 2000 <u>1000</u> MHz	54 dBμV/m																															
except for:																																
156 -165 MHz	24 dBμV/m																															
Frequency range:	Average limit:																															
<u>1000 - 6000 MHz</u>	54 dBμV/m																															
20.	Conducted Emission	CISPR 16-2-1	<p>Test applicable to AC and DC power ports</p> <p>For equipment installed in the bridge and deck zone.</p> <table><tr><td>Frequency range:</td><td>Limits:</td></tr><tr><td>10 - 150 kHz</td><td>96 - 50 dBμV</td></tr><tr><td>150 - 350 kHz</td><td>60 - 50 dBμV</td></tr><tr><td>350 kHz - 30 MHz</td><td>50 dBμV</td></tr></table>	Frequency range:	Limits:	10 - 150 kHz	96 - 50 dBμV	150 - 350 kHz	60 - 50 dBμV	350 kHz - 30 MHz	50 dBμV																					
Frequency range:	Limits:																															
10 - 150 kHz	96 - 50 dBμV																															
150 - 350 kHz	60 - 50 dBμV																															
350 kHz - 30 MHz	50 dBμV																															

E10

(cont)

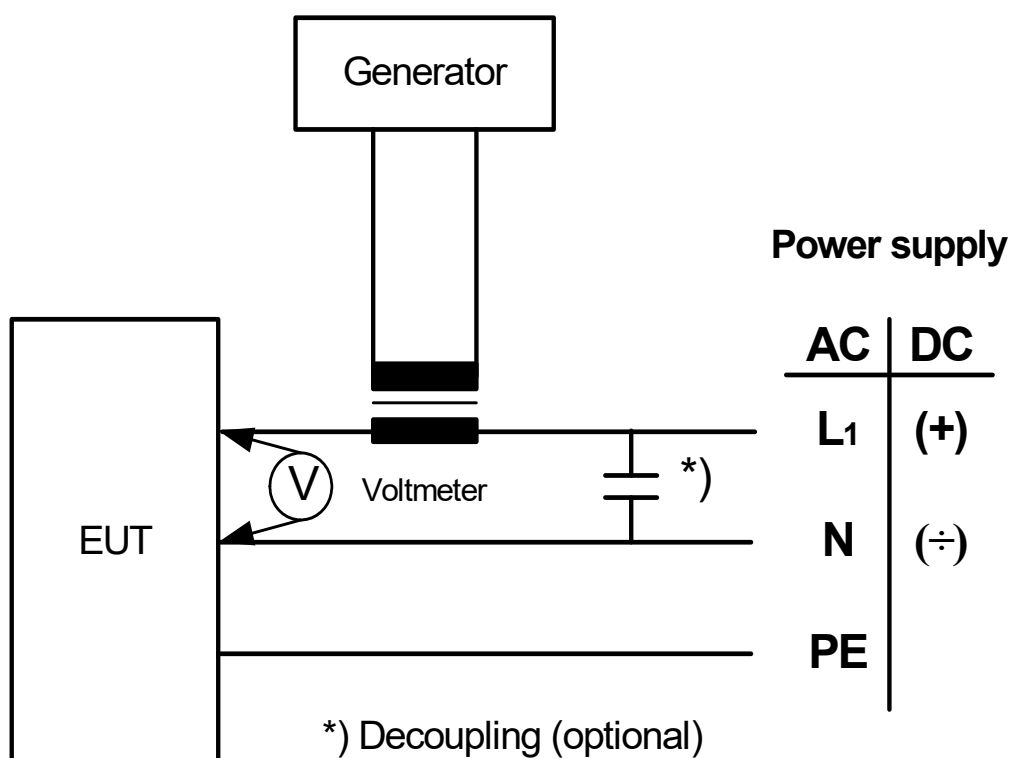
NO.	TEST	PROCEDURE ACC. TO:*	TEST PARAMETERS	OTHER INFORMATION								
			<p>For equipment installed in the general power distribution zone.</p> <table><tr><td>Frequency range:</td><td>Limits:</td></tr><tr><td>10 - 150 kHz</td><td>120 - 69 dBμV</td></tr><tr><td>150 - 500 kHz</td><td>79 dBμV</td></tr><tr><td>0.5 - 30 MHz</td><td>73 dBμV</td></tr></table>	Frequency range:	Limits:	10 - 150 kHz	120 - 69 dBμV	150 - 500 kHz	79 dBμV	0.5 - 30 MHz	73 dBμV	
Frequency range:	Limits:											
10 - 150 kHz	120 - 69 dBμV											
150 - 500 kHz	79 dBμV											
0.5 - 30 MHz	73 dBμV											
21.	Flame retardant	IEC 60092-101 or IEC 60695-11-5	<p>Flame application: 5 times 15 s each. Interval between each application: 15s or 1 time 30s.</p> <p>Test criteria based upon application.</p> <p>The test is performed with the EUT or housing of the EUT applying needle-flame test method.</p>	<ul style="list-style-type: none">- the burnt out or damaged part of the specimen by not more than 60 mm long.- no flame, no incandescence or- in the event of a flame or incandescence being present, it shall extinguish itself within 30 s of the removal of the needle flame without full combustion of the test specimen.- any dripping material shall extinguish itself in such a way as not to ignite a wrapping tissue. The drip height is 200 mm ± 5 mm.								

E10

(cont)

Notes:

1. ~~Equipment to be mounted in consoles, housing etc. together with other equipment are to be tested with 70°C.~~ Dry heat at 70 °C is to be carried out to automation, control and instrumentation equipment subject to high degree of heat, for example mounted in consoles, housings, etc. together with other heat dissipating power equipment.
2. For equipment installed in non-weather protected locations or cold locations test is to be carried out at -25°C.
3. Salt mist test is to be carried out for equipment installed in weather exposed areas.
4. Performance Criterion B: (For transient phenomena): The EUT shall continue to operate as intended after the tests. No degradation of performance or loss of function is allowed as defined in the technical specification published by the manufacturer. During the test, degradation or loss of function or performance which is self recoverable is however allowed but no change of actual operating state or stored data is allowed.
5. Performance Criterion A: (For continuous phenomena): The Equipment Under Test shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed as defined in relevant equipment standard and the technical specification published by the manufacturer.
6. For equipment installed on the bridge and deck zone, the test levels shall be increased to 10V rms for spot frequencies in accordance with IEC 60945 at 2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz.

**Figure - Test Set-up – Conducted Low Frequency Test**End of
Document