



Guideline No.E-11 (~~201909~~2022~~xx~~11)

**E-11**

# **PRESSURE TRANSMITTER**

Issued date: ~~May xx9th.11~~49x, 2022

© China Classification Society

## Foreword

CCS Product Inspection and Testing Guideline (hereinafter referred to as this Guideline) contains the technical requirements, inspection and testing criteria related to classification and statutory survey of marine products to be applied for CCS approval/inspection.

This Guideline frees the users to adopt other test methods and requirements which are equivalent to or are stricter than this Guideline.

This Guideline is published and updated by CCS, and is released at <http://www.ccs.org.cn>. Your comments or suggestions are welcomed and may be sent to our email addressed [mp@ccs.org.cn](mailto:mp@ccs.org.cn).

Historical versions and release date: E-11(201510)    October 20, 2015

E-11(201610)    October 28, 2016

E-11(201705)    May 9, 2017

### Main changes:

1. [EC60770-1:2010{Ed.2.0}](#), [IEC60770-2:2010{Ed.3.0}](#);” is replaced by [“IEC62828-1:2017, IEC62828-2:2018 ”](#) .Relevant parts are modified. [“~~IEC60079-0:2011 { Ed.6.0 } ; IEC60079-1:2014 {Ed.7.0} ; IEC60079-11:2011 {Ed.6.0} ;~~”](#) is modified to [“IEC60079-0:2017 {Ed.7.0} ; IEC60079-1:2014/COR1:2018 {Ed.7.0} ; IEC60079-11:2011/COR1:2012 {Ed.6.0} ”](#) .

[2.Edit modifications and corrections.](#)

**CONTENTS**

1 Application.....	4
2 Normative reference documents .....	4
3 Definitions.....	<del>5</del> <u>54</u>
4 Plans and documents.....	5
5 Design and technical requirements .....	6
6 Main components and parts .....	8
7 Type test.....	8
8 Unit/batch inspection .....	<del>20</del> <u>16</u>

## PRESSURE TRANSMITTER

### 1 Application

This Guideline applies to the verification and certification of the marine pressure transmitter installed independently on the ship and offshore installations, or acting as component on other marine equipment.

### 2 Normative reference documents

#### 2.1 Technical requirement

2.1.1 Chapter 1, Part Four and Chapter 1 and 2, Part Seven of China Classification Society Rules for Classification of Sea-Going Steel Ships and its Changing Notices ~~Chapter 1, Part Four and Chapter 2, Part Seven of China Classification Society Rules for Classification of Sea-Going Steel Ships and its Amendments.~~

2.1.2 IEC 60079-0:2017 {Ed.7.0} Explosive atmospheres - Part 0: Equipment - General requirements-

2.1.3 IEC 60079-1:2014/COR1: 2018 {Ed.7.0} Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"-

2.1.4 IEC 60079-11:2011/COR: 2012 {Ed.6.0} Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"-

2.1.5 [IEC 62828-1:2017 Reference conditions and procedures for testing industrial and process measurement transmitters - Part 1: General procedures for all types of transmitters](#) ~~IEC 60770-1:2010 {Ed.2.0} Transmitters for use in industrial process control systems - Part 1: Methods for performance evaluation.~~

2.1.6 [IEC 62828-2:2017 Reference conditions and procedures for testing industrial and process measurement transmitters - Part 2: Specific procedures for pressure transmitters](#) ~~IEC 60770-2:2010 {Ed.3.0} Transmitters for use in industrial process control systems - Part 2: Methods for inspection and routine testing.~~

#### 2.2 Test requirement

2.2.1 CCS GD22-2015 Guideline on Type Approval Test of Electrical and Electronic Products (Current edition) [and IACS UR E10 Test Specification for Type Approval.](#)-

2.3 Any standard cited in the chapter can be replaced with other equal standards or those accepted by CCS according to actual conditions.

### 3 Definitions

3.1 Pressure transmitter: A device ~~which that can convert the pressure variable into a transferable standard signal which has a given continuous functional relationship (usually a linear function) between its output signal and the pressure variable.~~ ~~changes the measured pressure signal into standard signal, consisting of two parts, namely, the converter (device) and pressure sensor. The pressure is measured by the sensor. The pressure sensor can be classified into the differential transformer type pressure sensor, Hall pressure sensor, strain type pressure sensor, piezoelectric type pressure sensor, and magnetic pressure type (tension) sensor.~~

3.2 Terminal-based cConformity: The calibration curve of the device can be adjusted to be close to the specified characteristic curve, so as to make the coincidence degree when the upper limit and lower limit of the range of the input and output curves coincide. ~~For a curve, it indicates the inosculation degree when approaching a specific curve (such as the logarithmic curve and parabolic root curve).~~

3.3 Dead zone: It indicates the max. ~~input~~ input change that does not cause perceptible output change. –

3.4 Return difference: It indicates the component feature that represents the dependency of previous stroke and current moving direction via value output for the given input stroke (See Fig. ~~B4-5.3.3(1)~~ and ~~B25.3.3(2)~~). That is a common definition, including hysteresis error and dead zero. Since the error generated by the dead zone can be determined via conventional dead zone test, the error related to previous stroke is the hysteresis error.

3.5 Hysteresis error: The error in the return difference caused due to the component energy absorbing of the measuring instrument.

3.6 ~~Non-r~~Repeatability: ~~The The algebraic difference~~ conformity degree of the same input value in many consecutive measurements at the time of full-range moving and approaching from the same direction under the same operation condition.

3.7 Max. allowable error: The max. relative error between the actually measured value and the calibration value corresponding to its accuracy (level). –

### 4 Plans and documents

4.1 The following plans and technical documents should be submitted for review :

- (1) Factory profile: factory name, address, production history, production capacity, technicians and testing personnel, main products, membership relation, product brand and etc.;
- (2) Details of the products applying for approval (Product model and main technical indicators);
- (3) List of the main production equipment;

- (4) List of the main testing equipment;
- (5) Brief production processes of the product applying for approval, at least including the assembly, commissioning and other key processes;
- (6) Quality management documents or quality system certificates;
- (7) Corporate registration certificate;
- (8) Qualification certificate and/or production license, if applicable;
- (9) Copies of product quality certificates or certificates of conformity;
- (10) Quality control plan, if applicable;
- (11) List of eligible suppliers;
- (12) Drawings and technical documents (Outline, structure diagram, electrical schematic diagram, technical documents, product operation manual, external wiring diagram, system function block diagram including system input and output signals, feedback and self-inspection block diagram (if applicable)).The technical documentation must make it possible to assess the product's compliance with the technical requirements.Complete design plans (including the general plan, structure plan, schematic diagram, external wiring diagram and technical product document);
- (13) Product Operation Instructions.

## 5 Design and technical requirements

5.1 For explosion-proofing marine pressure transmitter should meet the requirements specified in Article 1.3.3, Chapter 1, Part Four of China Classification Society Rules for Classification of Sea-Going Steel Ships and its Changing Notices.The measuring product type approval certificate (as well as relevant measuring product production license) must be applied for and obtained for the pressure transmitter from the national legal unit.

5.2 The marine pressure transmitter should meet the requirements specified in Chapter 1 and 2, Part Seven of China Classification Society Rules for Classification of Sea-Going Steel Ships and its Changing Notices.Explosion proofing certificate of qualification accepted by CCS must be obtained for the explosion proof pressure transmitter.

5.3 The marine pressure transmitter should meet the general requirements specified in Sections 1 and 7, Chapter 2, Part Seven of China Classification Society Rules for Classification of Sea-Going Steel Ships and its Amendments.

5.34 The marine pressure transmitter should have the following general performance and functions:

5.34.1 Appearance and structure

- (1) The transmitter should be free of obvious defect, scratch or mildew in appearance; the connection thread should be free of rag, corrosion, or damage; the weld should be firm; the connector should be connected reliably; the painted enclosure should be colored uniformly with smooth film, and free of peeling off or knock trace.
- (2) The components of the transmitter should be intact without any damage, the fastener should be free of looseness or damage, and the movable parts should be flexible and reliable. For the transmitter with display unit, the digit should be displayed clearly without any missing.
- (3) The nameplate of the transmitter should be complete and legible with the following information: main technical indexes such as the product name, model and specification, measuring range, accuracy level, rated operating pressure, name or trademark of the manufacturer, factory number, manufacturing date, license sign for producing the measuring instrument and number, as well as marine sign for marine products.

5.43.2 Leakproofness

The pressure transmitter must be free of any leakage after being sealed for 15 min with the pressure source switched off when its measuring part bears the upper measuring pressure limit. During the last 5 min., the pressure drop cannot exceed 2% of the measured upper limit.

5.43.3 Accurate level and error class

Unless otherwise specified, for the transmitter with adjustable range and movable zero point, the relevant accuracy and technical requirements shall be met on a certain range set by the transmitter.

After adjustment of the transmitter accessories, their accuracy class shall not be lower than that specified in table 5.3.3 (1)

List of accuracy levels class after adjustment and errors — Table 5.3.3 (1)

<u>Before adjustment</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>
	<u>0.025</u>	<u>0.05</u>	<u>0.075</u>	<u>0.1</u>	<u>0.25</u>	<u>0.5</u>	<u>1.0</u>	<u>1.5</u>
<u>After adjustment</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade 0.1</u>	<u>Grade</u>	<u>Grade 0.5</u>	<u>Grade</u>	<u>Grade</u>	<u>Grade</u>
	<u>0.05</u>	<u>0.075</u>		<u>0.25</u>		<u>1.0</u>	<u>1.5</u>	<u>1.5</u>

The indicators related to the accuracy level of the transmitter shall not exceed the provisions in table 5.3.3 (2).

带格式的：段落间距段前：1 行，允许文字在单词中间换行

带格式的：字体：小五，不对齐到网格

带格式的：左，段落间距段后：12 磅，行距：单倍行距，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式表格

带格式的：字体：小五，不对齐到网格

带格式的：左，段落间距段后：12 磅，行距：单倍行距，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：正文，左，定义网格后自动调整右缩进，段落间距段前：1 行，到齐到网格，制表位：不在 17.72 字符

带格式的：到齐到网格

**Indicators related to accuracy class Table 5.3.3 (2)**

Items	accuracy class								
	0.025	0.05	0.075	0.1	0.25	0.5	1.0	1.5	
	Indicators (Percentage of output span)								
Inaccuracy	±0.025	±0.050	±0.075	±0.10	±0.25	±0.50	±1.0	±1.5	
Terminal base consistency error	±0.025	±0.050	±0.075	±0.10	±0.25	±0.50	±1.0	±1.5	
Hysteresis	0.020	0.040	0.060	0.080	0.20	0.40	0.80	1.2	
Repeatability error	0.012	0.025	0.037	0.050	0.12	0.25	0.50	0.75	
Dead band	0.012	0.025	0.037	0.050	0.10	0.10	0.10	0.15	
Step response	Stabilization time is not more than 5 s								
Start-up drift	Maximum error	0.025	0.050	0.075	0.10	0.25	0.50	1.0	1.5
	Lower limit variation	0.050	0.10	0.15	0.20	0.50	1.0	2.0	3.0
Long-term drift*	Range change variation	0.050	0.10	0.15	0.20	0.50	1.0	2.0	3.0

Note: \* Start calculation after power on for 24h. 5.4.3

Accuracy level	Max. allowable error/%	Return difference/%	Conformity/%	Repeatability/%
0.05	±0.05	0.05	±0.05	0.05
0.1	±0.1	0.08	±0.1	0.08
0.25	±0.25	0.20	±0.25	0.20
0.5	±0.5	0.4	±0.5	0.4

- 带格式的: 允许文字在单词中间换行
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 左, 段落间距段后: 12磅, 行距: 单倍行距, 制表位: 2字符, 左对齐 + 5.16 字符, 居中
- 带格式表格
- 带格式的
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的: 左, 段落间距段后: 12磅, 行距: 单倍行距, 制表位: 2字符, 左对齐 + 5.16 字符, 居中
- 带格式的
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 左, 段落间距段后: 12磅, 行距: 单倍行距, 制表位: 2字符, 左对齐 + 5.16 字符, 居中
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 左, 段落间距段后: 12磅, 行距: 单倍行距, 制表位: 2字符, 左对齐 + 5.16 字符, 居中
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的
- 带格式的: 字体: 五号, 非加粗
- 带格式的
- 带格式的

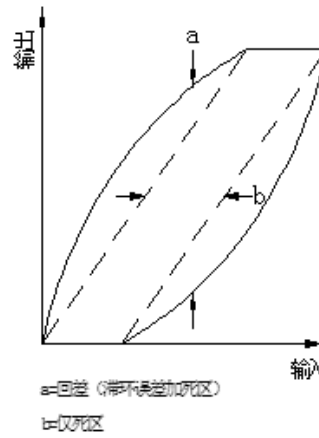
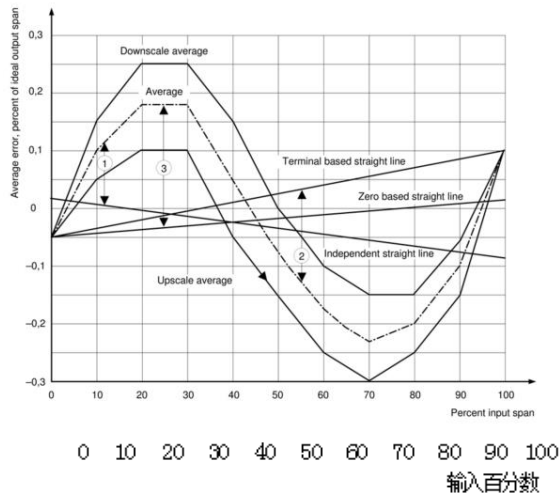


Fig. 5.34.3(1) Deviation curve

Fig. 5.43.3(2) Return difference

带格式的: 字体: Times New Roman, 五号

带格式的: 字体: Times New Roman, 五号

带格式的: 字体: Times New Roman, 五号

#### 5.34.4 Insulation resistance

The insulation resistances between each terminal and enclosure of the transmitter (meter cover or frame) should not be less than 120MΩ at the ambient temperature of 15°C~25°C and relative humidity of 50%~70%.

#### 5.34.5 Insulation rating

Unless otherwise specified by manufacture, there should be no breakdown and flashover after the 50 Hz and 500 V AC test voltage has been applied between each terminal and enclosure of the transmitter for 1 min. at the ambient temperature of 15°C~25°C and relative humidity of 45%~70%.

#### 5.34.6 Return difference

The return difference should be measured together with the error, and the result should meet the requirement in Table 5.34.3(2).

#### 5.34.7 Conformity

If the conformity adopts the terminal-based conformity, ~~and~~ the result should meet the requirement in Table 5.34.3(2).

#### 5.34.8 ~~Non-repeatability~~ Repeatability

The ~~Non-repeatability should be measured, and the result should meet the requirement in Table 5.3.3(2).~~

带格式的: 字体: 五号

~~Conduct pressure measurement for three circles, and calculate the test standard deviation of the same stroke at each measuring point. Take the max. value as the repeatability of the instrument. The result should meet the requirement in Table 5.4.3.~~

5.34.9 Measuring dead zone

The ~~result of measuring dead zone of the pressure transmitter should meet the requirement in Table 5.3.3(2), is less than 0.1% of the range.~~

~~5.45 The marine pressure transmitter with explosion-proof mark shall obtain the explosion-proof certificate of relevant institutions accepted by CCS. Explosion proofing certificate of qualification issued by relevant institute that is accepted by CCS should be obtained for marine pressure transmitters with explosion proofing mark.~~

**6 Main components and parts**

The raw materials and parts of the product shall be controlled in accordance with the current regulations of the state.

**7 Type test**

7.1 Selection of typical samples

7.1.1 The model and specification of the sample for type test should cover the product range applied for approval with technical representativeness, so as to determine, via type test, whether the manufacturer is capable of manufacturing the approved products according to the requirement of CCS.

7.1.2 Each series of pressure transmitters should be subject to type test, and samples should be selected as per the representativeness of pressure measurement range, accuracy, structure type, protection level, and manufacturing process, with at least 2 sets for each series.

7.2 Type approval test items

7.2.1 The factory (or CCS) should formulate the type test program according to relevant provisions, which should be approved by CCS. For specific test items, methods and requirements as stated in the type test program, see the table below:

List of type test items

Table 7.2.1

No.	Test items	Test method (test standard)	Technical test requirement

带格式的: 段落间距段前: 1 行

带格式的: 字体: 非加粗

带格式的: 字体: 非加粗

带格式的: 居中

带格式的: 缩进: 首行缩进: 0 厘米

带格式的: 字体: 小五

带格式的: 字体: 非加粗

带格式表格

带格式的: 字体: 小五

带格式的: 字体: 非加粗

带格式的: 字体: 小五

带格式的: 字体: 小五









E-11 (201909202211) PRESSURE TRANSMITTER

		<a href="#">Test Specification for Type Approval</a>	<a href="#">products (current edition)</a> <a href="#">2.8 and IACS UR E10</a> <a href="#">Test Specification for Type Approval</a>
<a href="#">5</a>	<a href="#">Low temperature Test</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.9</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.9</a>

**Continued Table 7.2.1**

<a href="#">6</a>	<a href="#">Enclosure test</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.15</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.15</a>
<a href="#">7</a>	<a href="#">Exposure to solar radiation</a>	<a href="#">+Temperature in the chamber: +55°C Radiation intensity: 1125W/m2(Including flux density of the ultra-violet portion of spectrum with a wave length of 280 – 400 nm shall be not less than 42 W/m2). Subjected to the test are appliances with the use of plastics which are intended for operation on the open deck in areas where they are continuously exposed to solar radiation</a>	<a href="#">No deformation, cracking, stratification, buckling, ungluing of plastic pieces and other materials has taken place. No degradation of readability of inscriptions and signs on the instrument scales has not been detected. Parameters and resistance of insulation have remained normal</a>
<a href="#">8</a>	<a href="#">Salt mist test Kb</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.12</a>	<a href="#">Comply with guideline on type approval test of electrical and electronic products (current edition) 2.12</a>
<a href="#">9</a>	<a href="#">Explosion-proof performance requirement</a>	<a href="#">Meet the requirement specified in Article 5.1 of the Guideline</a>	<a href="#">Meet the requirement specified in Article 5.1 of</a>

- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式表格
- 带格式的: 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 字体: (默认) 宋体, 小五, 不对齐到网格
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米
- 带格式的: 字体: 小五, 非上标/下标, 不对齐到网格
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米
- 带格式的: 字体: 小五, 不对齐到网格
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米, 制表位: 2 字符, 左对齐 + 5.16 字符, 居中
- 带格式的
- 带格式的: 居中, 缩进: 首行缩进: 0 厘米



E-11 (201909202211) PRESSURE TRANSMITTER

			<u>Type Approval</u>
<u>15</u>	<u>Electromagnetic compatibility test 5: Electrical fast transient burst immunity test</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.6</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.6</u>

带格式的：字体：小五，不对齐到网格

带格式的：字体：小五，不对齐到网格

带格式的：居中，缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：居中，缩进：首行缩进：0 厘米

带格式的：缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：字体：小五，不对齐到网格

**Continued Table 7.2.1**

<u>16</u>	<u>Electromagnetic compatibility test 6: Surge immunity test</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.7</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.7</u>
<u>17</u>	<u>Electromagnetic compatibility test 7: Low frequency conduction immunity test</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.8</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.8</u>
<u>18</u>	<u>Electromagnetic compatibility test 8: Radio-frequency field conducted disturbance immunity test</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.9</u>	<u>Comply with guideline on type approval test of electrical and electronic products (current edition) 3.9</u>

带格式的：字体：小五，不对齐到网格

带格式的：居中，缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式表格

带格式的：居中，缩进：首行缩进：0 厘米

带格式的：缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：字体：小五，不对齐到网格

带格式的：字体：小五，不对齐到网格

带格式的：居中，缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：居中

带格式的：缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：字体：小五，不对齐到网格

带格式的：字体：小五，不对齐到网格

带格式的：居中，缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：居中，缩进：首行缩进：0 厘米

带格式的：缩进：首行缩进：0 厘米，制表位：2 字符，左对齐 + 5.16 字符，居中

带格式的：字体：小五，不对齐到网格

带格式的：字体：非加粗

<u>No.</u>	<u>Test items</u>	<u>Test method (test standard)</u>	<u>Technical test requirement</u>
<u>+</u>	<u>Structure and visual inspection</u>	<u>Technical product conditions of the manufacturer</u>	<u>Meet the requirement on technical product conditions</u>
<u>±</u>	<u>Performance requirement</u>	<u>Obtain the sample test certificate of</u>	<u>Meet the requirement on technical product conditions</u>

E-11 (201909202211) PRESSURE TRANSMITTER

		qualification	
2.1	Measurement tolerance (accuracy)	5.4.3 of the Guideline	Meet the requirement specified in 5.4.3
2.2	Return difference measurement	5.4.6 of the Guideline	Meet the requirement specified in 5.4.6
2.3	Conformity measurement	5.4.7 of the Guideline	Meet the requirement specified in 5.4.7
2.4	Repeatability	5.4.8 of the Guideline	Meet the requirement specified in 5.4.8
2.5	Measuring dead zone	5.4.9 of the Guideline	Meet the requirement specified in 5.4.9
3	Explosion proof performance requirement	Obtain relevant explosion proofing certificate of qualification	Meet the requirement of technical product documents
4	Power supply variation test	Guideline on type approval test of electrical and electronic products (current edition) 2.5	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.5
5	Insulation resistance	5.4.4 of the Guideline	Meet the requirement specified in 5.4.4
6	Vibration test	Guideline on type approval test of electrical and electronic products (current edition) 2.7	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.7

带格式的：字体：小五

## E-11 (201909202211) PRESSURE TRANSMITTER

Continued Table 7.2.1

No.	Test items	Test method (test standard)	Technical test requirement
7	Dry heat test	Guideline on type approval test of electrical and electronic products (current edition) 2.8	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.8
8	Low temperature test	Guideline on type approval test of electrical and electronic products (current edition) 2.9	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.9
9	Cyclic damp heat test	Guideline on type approval test of electrical and electronic products (current edition) 2.10	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.10
10	Salt mist test Kb	Guideline on type approval test of electrical and electronic products (current edition) 2.12	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.12
11	Insulation rating test	5.4.5 of the Guideline	Retirement in 5.4.5 of the Guideline
12	Enclosure protection test	Guideline on type approval test of electrical and electronic products (current edition) 2.15	Comply with Guideline on type approval test of electrical and electronic products (current edition) 2.15
13	Electromagnetic compatibility test 1: Conduction emission measurement	Guideline on type approval test of electrical and electronic products (current edition) 3.2	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.2
14	Electromagnetic compatibility test 2: Radiation emission measurement at the enclosure port	Guideline on type approval test of electrical and electronic products (current edition) 3.3	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.3
15	Electromagnetic compatibility test 3: Electrostatic discharge immunity test	Guideline on type approval test of electrical and electronic products (current edition) 3.4	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.4
16	Electromagnetic compatibility test 4: Radio frequency electromagnetic field radiated immunity test	Guideline on type approval test of electrical and electronic products (current edition) 3.5	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.5

Continued Table 7.2.1

No.	Test items	Test method (test standard)	Technical test requirement
17	Electromagnetic compatibility test 5: Electrical fast transient burst immunity test	Guideline on type approval test of electrical and electronic products (current edition) 3.6	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.6
18	Electromagnetic compatibility test 6: Surge immunity test	Guideline on type approval test of electrical and electronic products (current edition) 3.7	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.7
19	Electromagnetic compatibility test 7: Low frequency conduction immunity test	Guideline on type approval test of electrical and electronic products (current edition) 3.8	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.8
20	Electromagnetic compatibility test 8: immunity test on conducted disturbance induced in radio frequency field	Guideline on type approval test of electrical and electronic products (current edition) 3.9	Comply with Guideline on type approval test of electrical and electronic products (current edition) 3.9

## 8 Unit/batch inspection

8.1 After type approval B, the single piece/batch inspection shall be carried out after the manufacturer completes the installation and delivery test. The factory test report shall be submitted to CCS together with the product inspection notice. The Surveyor can conduct the single piece/batch inspection on the products with sampling proportion of 5% (but at least 2 sets) based on the full inspection of the factory.

~~According to the requirements of the LIST OF CERTIFICATION REQUIRMENTS FOR CLASSED MARINE PRODUCTS of "Rules for Classification of sea going steel ships", the product is approved only for non inspection. If the manufacture applies for unit/batch inspection, the Surveyor can conduct a delivery inspection on the products with sampling proportion of 5% (but at least 2 sets) based on the full inspection of the factory.~~

For factory test items, methods, and technical requirements, see the table below:

List of factory test items

Table 8.1

No.	Test items	Test method (test standard)	Technical test requirement
1	Structure and visual inspection	Technical product conditions approved by CCS	Meet the requirement on technical product conditions
2	<u>Inaccuracy</u>	<u>Technical product conditions approved by CCS</u>	<u>Meet relevant technical requirements on the product</u>

带格式的：字体：非加粗

带格式表格

E-11 (201909202211) PRESSURE TRANSMITTER

3	<u>Hysteresis</u>	<u>Technical product conditions approved by CCS</u>	<u>Meet relevant technical requirements on the product</u>
4	<u>Static pressure (if applicable)</u>	<u>Technical product conditions approved by CCS</u>	<u>Meet relevant technical requirements on the product</u>

带格式的：字体：小五

带格式的：字体：小五

**Continued Table 8.1**

5	<u>Insulation resistance (if applicable)</u>	<u>Technical product conditions approved by CCS</u>	<u>Meet relevant technical requirements on the product</u>
6	<u>Insulation rating (if applicable)</u>	<u>Technical product conditions approved by CCS</u>	<u>Meet relevant technical requirements on the product</u>
27	<u>Leakage test</u> <u>Leak-proofness</u>	Technical product conditions approved by CCS	Meet the requirement on technical product conditions

带格式表格

带格式的：字体：小五

带格式的：字体：小五

带格式的：正文，居中，缩进：首行缩进：0 厘米，定义网格后自动调整右缩进，段落间距段后：12 磅，到齐到网格，制表位：2 字符，左对齐 + 5.16 字符，居中

**Continued Table 8.1**

No.	Test items	Test method (test standard)	Technical test requirement
3	Measurement error (accuracy)	Technical product conditions approved by CCS	Meet the requirement on technical product conditions
4	Insulation resistance (if applicable)	Technical product conditions approved by CCS	Meet relevant technical requirements on the product
5	Insulation rating (if applicable)	Technical product conditions approved by CCS	Meet relevant technical requirements on the product

带格式的：段落间距段前：1 行

Note: Subject to the technical features of the products, the insulation resistance measurement and insulation rating test can be optional during factory test.

带格式的

带格式的：无间隔，段落间距段前：1 行，行距：多倍行距 1.15 字行